Activated Carbon Data Sheet

AquaPur 400R 12x40

Tetrasolv FILTRATION

Applications

Wastewater Treatment

Hydrocarbon Removal

Remediation

Toxin Remval

Features/Benefits

Recycled Material

High Activity

High Hardness

Low Dust

Spent Carbon Return

Packaging

1000 pound bulk bags

50 pound bags

Tetrasolv
444 E. 29th Street
Anderson, in 46016

14549 Minetta Street
Houston, TX 77035

Phone: 765-643-3941
E-mail: info@tetrasolv.com

AquaPur 400R 12x40 is a liquid phase reactivated carbon. This granular product has excellent adsorptive properties for removing organics and hydrocarbons from wastewater and remediation applications.

AquaPur 400R 12x40 can be sold separately or as a part of a turnkey system including equipment and services.

Specifications

Iodine Number	800 mg/g min
Moisture	5% max as packed
Mesh Size +12 mesh	less than 10%
Mesh Size –40 mesh	less than 5%

Typical Properties

Ball Pan Hardness	90
Apparent Density	28-30 lbs/ft3

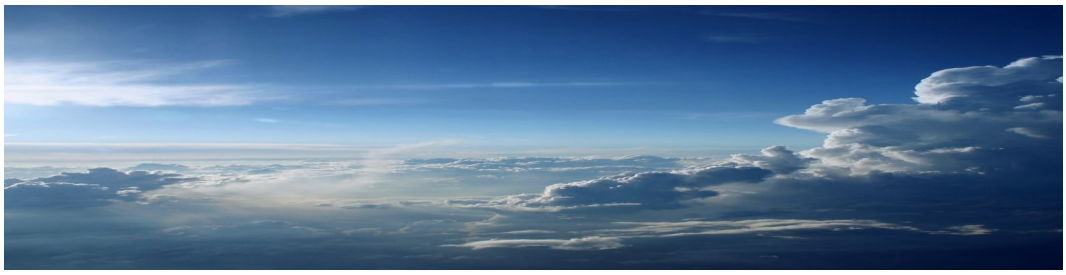

CAUTION *Activated carbon can remove oxygen from air under wet or humid conditions. Care should be taken when entering confined spaces where wet activated carbon is present. Use proper breathing apparatus to prevent prolong dust exposure.*

NOTICE *Tetrasolv reserves the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and carbon selection. Tetrasolv or any of its affiliations assumes no obligation or liability for the usage of the information in this datasheet. No guarantees or warranties, expressed or implied, are provided and the user must accept full responsibility for performance of carbon based on this data.*

Revised Jan 2023