PRODUCT DATA SHEET

Model HPAF-2000
Dual Bed Water Filter

Tetrasolv FILTRATION

Product Description

This system is designed to be used in aqueous phase treatment of groundwater or wastewater, and has the ability to remove contaminants to a very low level. The influent stream can be sent through the system in either series or parallel flow.

Technical Specifications

Weights and Measures

Max. Flowrates	Up to 70 gpm in series - or 140 gpm in parallel *(media/ application dependent)*
Max. Pressure	75 psi
Max. Temperature	150°F
Max. Height	8'6"
Width	70" *(skid)*
Length	111" *(skid)*
Diameter	48" *(each vessel)*
Shipping Weight	7,400 lbs. total *(equipment – 3,400 lbs; activated carbon – 4,000 lbs)*
Operating Weight	14,800 lbs.

Wetted Materials

Carbon Steel	Shell and heads
304 Stainless Steel	Bottom underdrain; Upper distributor header
Neoprene	Manway gaskets
Sherplate 600 (NSF Approved), optional Plasite 4110	Internal Liner

Filter Media

Types	Activated Carbon Ion Exchange Resins Organoclay Medias Specialty Media
Volume	75 cu. ft per vessel *(150 cu. ft. total capacity)*
Weight	~2,000 lbs. each vessel *(4,000 lbs. total) for activated carbon*

Miscellaneous

Vessel Code	Available in ASME Code stamped
Service In/Out	3" Flanged connection w/ sch. 80 piping
Backwash In/ Out	3" Flanged connection w/ sch. 80 piping
Manifold Valves	3" Lever-operated cast iron butterfly
Internals	Lower Underdrain: 3/4" 304 SS Upper Distributor: 3" header/3" open end riser
Vessel Interior Access	type constructed of 304 SS Top manway – 12"x16"

444 East 29th Street - Anderson, Indiana 46016

Phone: (765) 643-3941 www.tetrasolv.com

Revised Jan 2023

PRODUCT DATA SHEET

Tetrasolv FILTRATION

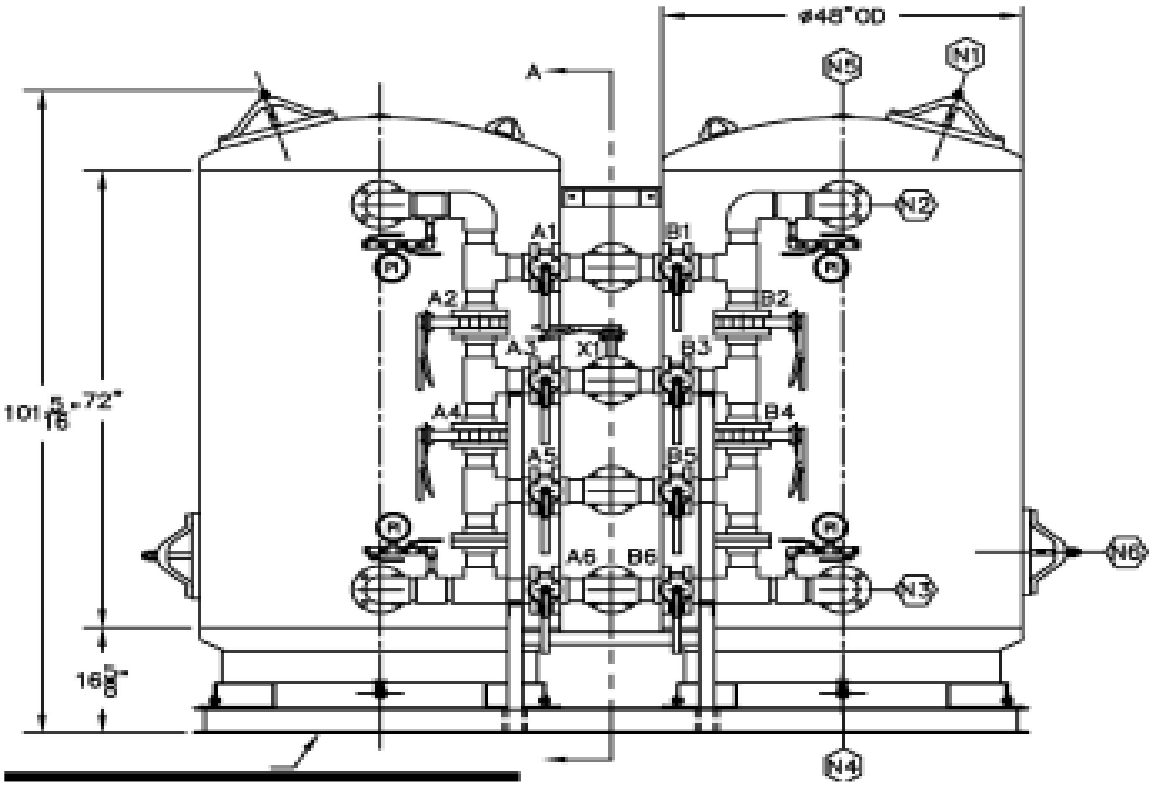

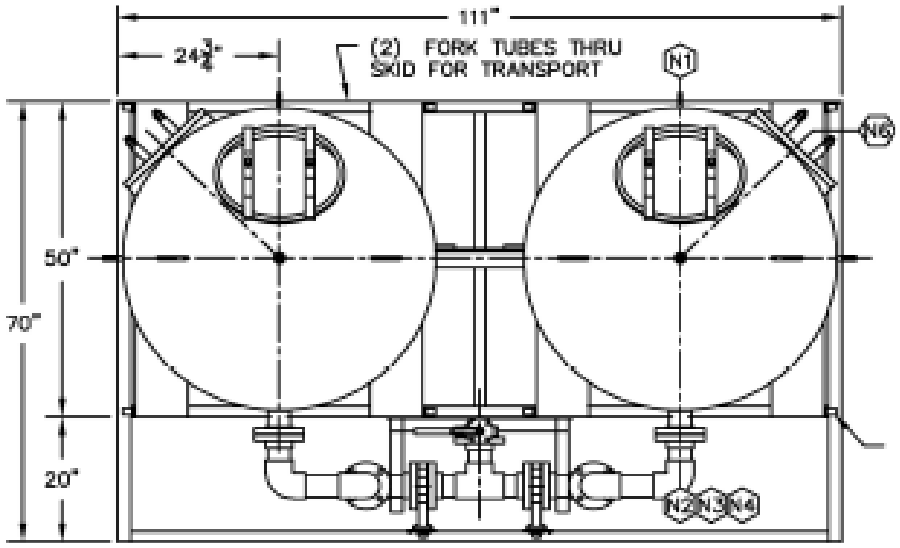

444 East 29th Street - Anderson, Indiana 46016

Phone: (765) 643-3941 www.tetrasolv.com

Revised Jan 2023